
HSZ-622A Series Heavy Duty Manual Chain Block Specifications




- Japan Model
- Load limiter is available at extra cost
- Low effort to lift maximum load
- Automatic double pawl braking system
- Premium grade alloy load chain and zinc plated hand chain as standard
- Drop-forged and expertly heat treated hooks for great strength and long wearing
- Capacity ranges from 0.5t to 20t, heavy duty 30t, 50t is available

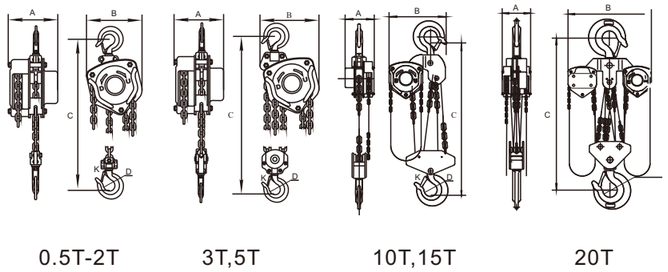

Model		HSZ-0.5	HSZ-1	HSZ-1.5	HSZ-2	HSZ-3	HSZ-5	HSZ-7.5	HSZ-10	HSZ-15	HSZ-20	HSZ-30
Capacity	tons	0.5	1	1.5	2	3	5	7.5	10	15	20	30
Standard lift	m	3	3	3	3	3	3	3	3	3	3	3
Running test load	kN	7.5	15	22.5	30	45	75	112.5	150	225	300	450
Effort required to lift rated load	N	225	300	350	310	350	400	415	410	420	410x2	410x2
Diameter of load chain	MM	5	6	7.1	8	7.1	9	10	9	10	9	10
Strands of load chain		1	1	1	1	2	2	3	4	6	8	12
Dimensions	A	132	152	155	185	152	185	189	185	194	220	274
	B	152	157	180	207	207	267	380	380	400	440	649
	C	315	355	375	430	500	680	650	750	880	940	1100
	D	34	38	48	48	50	57	72	80	85	106	120
	K	27	27	36	36	38	48	47	51	58	70	80
Net weight	kg	8.5	11	14.5	17.5	20.5	36.5	44	60	102	146	246
Packing measurement	cm	24.5x19x18	26x19x19	30.5x21x19	30x24x23	34x24x19	49x29x23	47x42x23	47x42x22	97x48x23	80x70x24	80x70x37
Extra weight per meter of extra lift	kg	1.3	1.6	2.2	2.3	3.2	4.5	7.5	8.1	14	16.2	28.2

HSZ-A619 Series Manual Chain Block Specifications

- One of best selling hoist
- Capacity ranges from 0.5t to 20t, heavy duty 30t,50t is available
- Heavy duty and compact design to meet all pertinent world standard
- Reliable disc brake, premium grade alloy load chain and zinc plated hand chain as standard
- Drop-forged and expertly heat treated hooks for great strength and long wearing

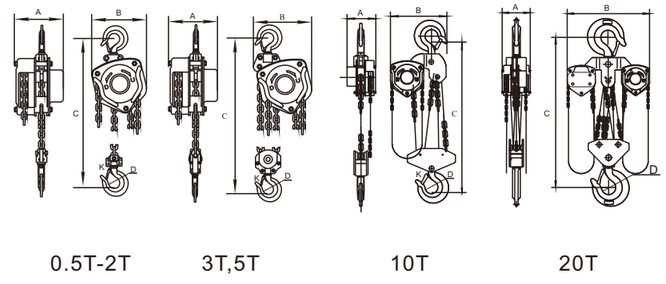



Model		HSZ-0.5	HSZ-1	HSZ-1.5	HSZ-2	HSZ-3	HSZ-5	HSZ-7.5	HSZ-10	HSZ-15	HSZ-20	HSZ-30
Capacity	tons	0.5	1	1.5	2	3	5	7.5	10	15	20	30
Standard lift	m	3	3	3	3	3	3	3	3	3	3	3
Running test load	kN	7.5	15	22.5	30	45	62.5	112.5	125	225	250	450
Effort required to lift rated load	N	231	309	320	360	340	414	415	414	420	410x2	410x2
Diameter of load chain	MM	6	6	8	8	8	10	10	10	10	10	10
Strands of load chain		1	1	1	1	2	2	3	4	6	8	12
Dimensions	A	131	140	161	161	161	186	189	207	194	215	274
	B	127	158	174	187	199	253	380	398	400	650	649
	C	270	317	399	414	465	636	650	798	880	890	1100
	D	35	35.5	45	42.5	50	64	72	85	85	110	120
	K	30	28	36	33.5	40	50	47	64	58	85	80
Net weight	kg	10	12	19	20	27	45.5	44	83	102	193	246
Packing measurement	cm	22x15x19.5	23x18x19.5	28x18x19.5	28x21x24	32x21x26	40x21x31	47x42x23	50x41x21	97x48x23	64x38x64	80x70x37
Extra weight per meter of extra lift	kg	1.8	2.4	2.4	2.4	3.8	5.4	7.5	9.8	14	19.6	28.2